

Placing boom


SPB 35



Manufacturer specification sheet follows. All figures are the manufacturer's published maximums.

Technical data

Designation	SPB 35
Boom	35 R
Delivery line	DN 125
Length of end hose	m 4.00
Horizontal reach	m 34.65
Vertical reach	m 35.00
Reach depth	m 30.00
Number of boom sections	4
Slewing range	530°
free standing height max. (without / with counterweight)	m 16.00 / 22.00
max. component weight (picking weight)	kg / lb 4,400 / 9,700
Total weight (without counter-jib, without mast sections)	kg / lb 8,600 / 18,960
Drive unit power	kW 30 (50 Hz) / 36 (60 Hz)

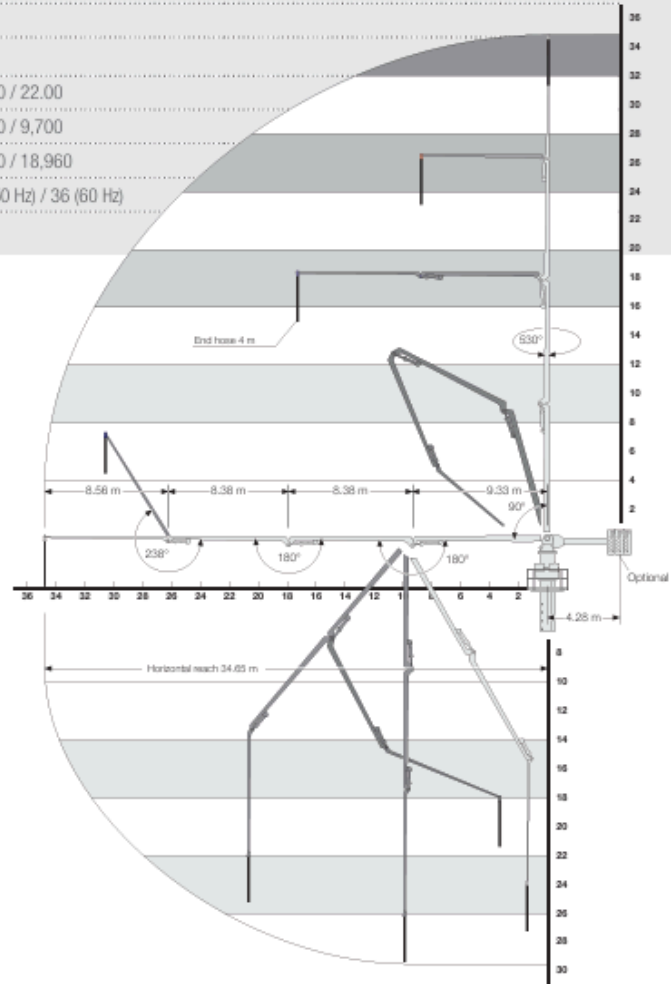

Separate placing booms from SCHWING.
Outstanding reliability and safety.